




Model	WH-5G-CP07
<b>Electrical parameter</b>	
Frequency Range	698-960/1710-2700/3400-3800/4800 (MHz)
Input Impedence	50 (Ω)
VSWR	≤ 1.5
Gain	5/7 (dBi)
Max Input Power	20 (W)
Polarization Type	Vertical
Connect Type	SMA male or N female
Lightning Protection	DC Ground
<b>Mechanical parameter</b>	
Working Temperature	-40°C ~ + 60°C
Storage Temperature	-30°C ~ + 55°C
Weight	100 (g)
Size	Φ32X90(mm)
Radome material	copper
Color	black







VSWR:

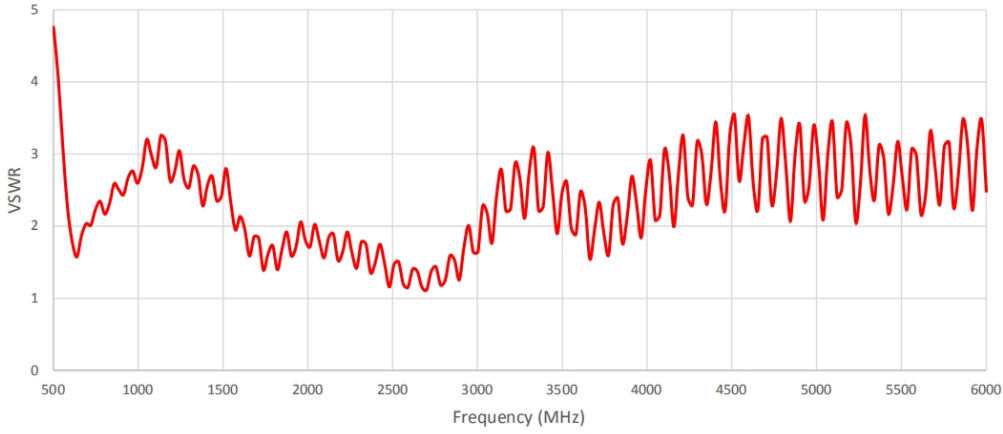

Peak gain:

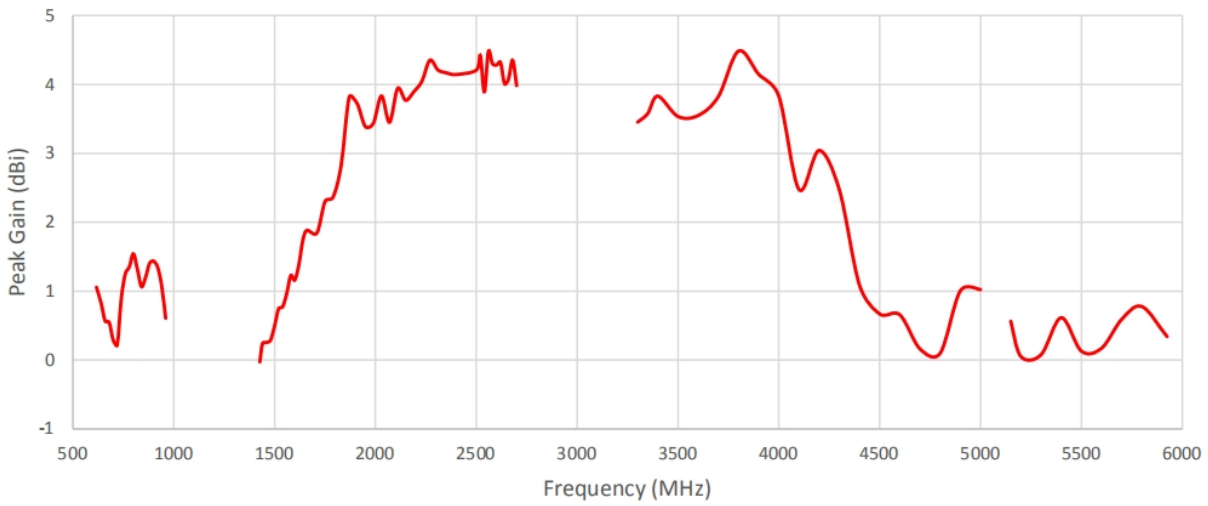

Return loss:

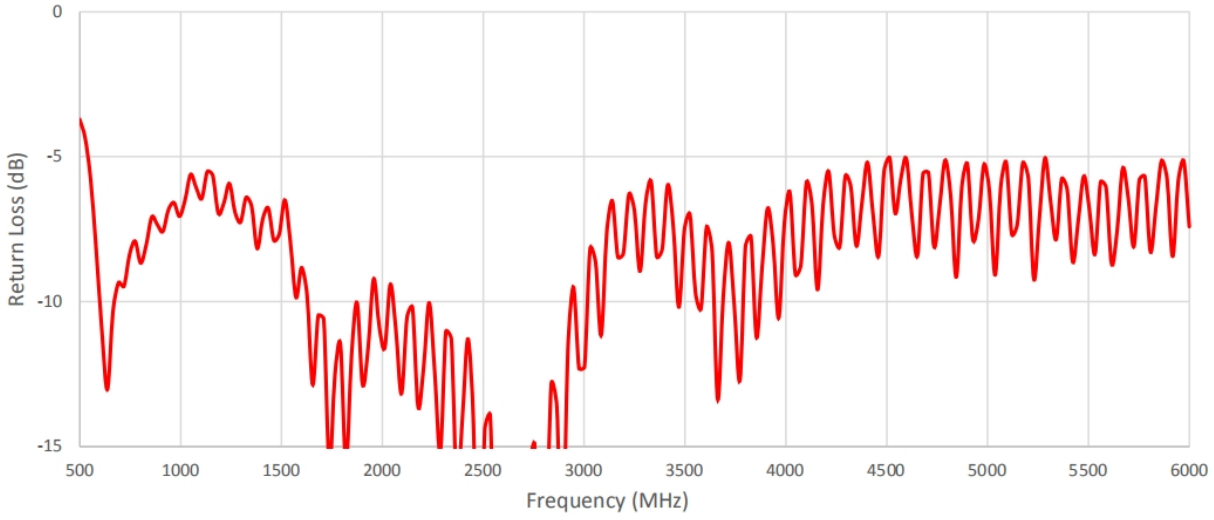

Drawing:

